

L7 Series

Super miniature size and 7mm high, low leakage current.
Designed for use in VTRs, car radios, Car stereos,
Micro-cassette tape recorders, pocket calculators and watches.




Orange


Characteristics

Voltage Range	6.3 - 50V						
Capacitance Range	0.1 - 220uF						
Temperature Range	-40 - +105°C						
Capacitance Tolerance	-20 - +20% (at 20°C, 120Hz)						
Leakage Current	I = 0.01CV or 3uA, Whichever is greater (After 2 minutes)						
Dissipation Factor (tan δ)	Rated voltage	6.3V	10V	16V	25V	35V	50V
	tan δ (max.)	0.24	0.20	0.16	0.14	0.12	0.10
Low Temperature Stability	Impedance ratio at 120Hz						
	Rated voltage	6.3V	10V	16V	25V	35V	50V
	Z-25°C/Z 20°C	4	3	2	2	2	2
Z-40°C/Z 20°C	10	8	6	4	4	3	
Load Life	After 1000 hours application of rated voltage at 105°C the capacitor shall meet the following characteristics						
	Capacitance Range	Within ±20% of initial value					
	D.F. (tan δ)	200% or less of initial specified value					
	Leakage Current	Initial specified value or less					

Diagram of Dimensions (mm)

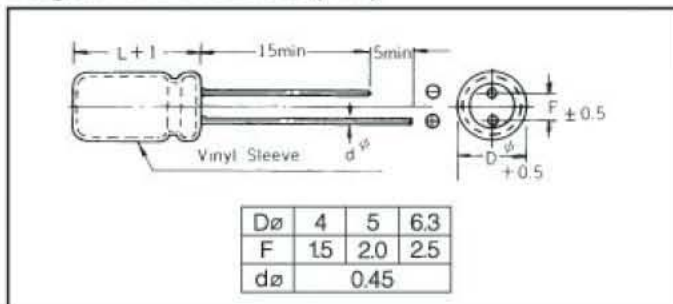

Part Numbering System

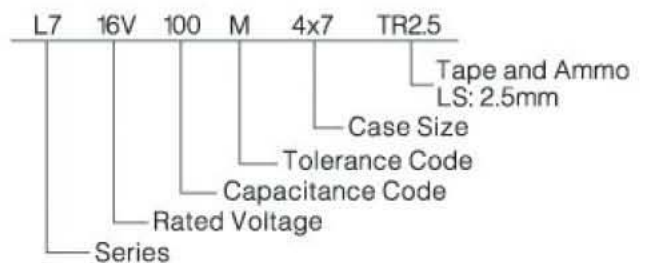

Case Size of Standard Products

VV	6.3	10	16	25	35	50
0.1						4x7
0.22						4x7
0.33						4x7
0.47						4x7
1						4x7
2.2						4x7
3.3						4x7
4.7						4x7
10			4x7	4x7	5x7	5x7
22			4x7	5x7	6.3x7	
33		4x7	5x7	6.3x7		
47	4x7	5x7	6.3x7	6.3x7		
100	5x7	6.3x7	6.3x7			
220	6.3x7	6.3x7				

Maximum E.S.R. (Ω20°C 120Hz) Maximum Ripple Current (mA rms 105°C 120Hz)

VV	6.3		10		16		25		35		50	
	ESR	IR	ESR	IR	ESR	IR	ESR	IR	ESR	IR	ESR	IR
0.1											1348	2
0.22											660	3
0.33											438	4
0.47											326	6
1											162	10
2.2											82.2	18
3.3											48.5	20
4.7											33.1	28
10					26.30	25	23.80	30	18.90	33	16.1	40
22					12.60	40	10.10	50	8.25	58		
33			10.02	42	8.14	58	7.18	63				
47	8.36	50	6.81	60	5.63	75	5.18	83				
100	3.75	75	3.08	87	2.80	96						
220	2.98	112	1.51	179								