

LAUBE

METAL OXIDE VARISTORS

**(H SERIES)
(Housing Series)**

[32MM DIAMETER](#)

[34MM DIAMETER](#)

[53MM DIAMETER](#)

H SERIES (Housing)


Diameter : 32/34/53mm

Part No.	Maximum Operating Voltage		Energy 10/1000 μ s			Withstanding Surge Current 8/20 μ s			Rated Wattage			Varistor Voltage ($\pm 10\%$)	Maximum clamping voltage at Note3 Current(V)
	AC (V)	DC (V)	(J)			1 time(KA)			(W)			at 1mA(V)	
			32D	34S	53D	32D	34S	53D	32D	34S	53D		
122K	750	970	960	1070	2650	30	40	70	1.2	1.4	1.6	1200(1080-1320)	1925
112K	680	895	875	950	2550							1100(990-1210)	1765
102K	660	850	795	875	2245							1000(945-1155)	1690
911K	575	745	725	836	2040							910(819-1001)	1460
821K	510	675	655	755	1835							820(738-902)	1315
751K	480	640	590	695	1630							750(675-825)	1205
681K	420	560	540	620	1530							680(612-748)	1100
621K	385	505	540	620	1225							620(558-682)	1000
511K	320	420	440	570	1120							510(459-561)	820
471K	300	385	390	520	1020							470(423-517)	755
431K	275	370	365	480	970							430(387-473)	695
391K	250	330	335	450	900							390(351-429)	630
361K	230	300	305	420	745							360(324-396)	580
241K	150	200	245	305	580							240(216-264)	390
201K	130	175	215	275	500							200(185-225)	330

Note3: *32D / 34S clamping voltage testing current 300A
 *53D max. clamping voltage testing current 500A

Dimension:

32D & 34S

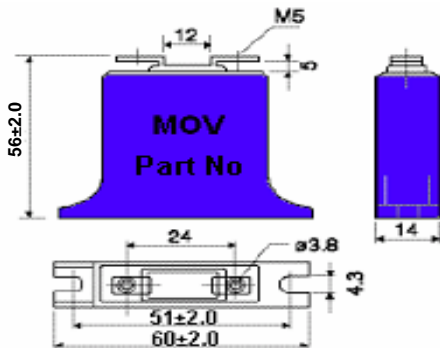

53D

