


JUMPER WIRES & ZERO OHM RESISTOR

Features

- Resistance less than 0.01 ohm
- One black band color-coding for easy identification
- Ideal straight - through between point on PC Boards




Explanation of Part Number & Ordering Procedure:

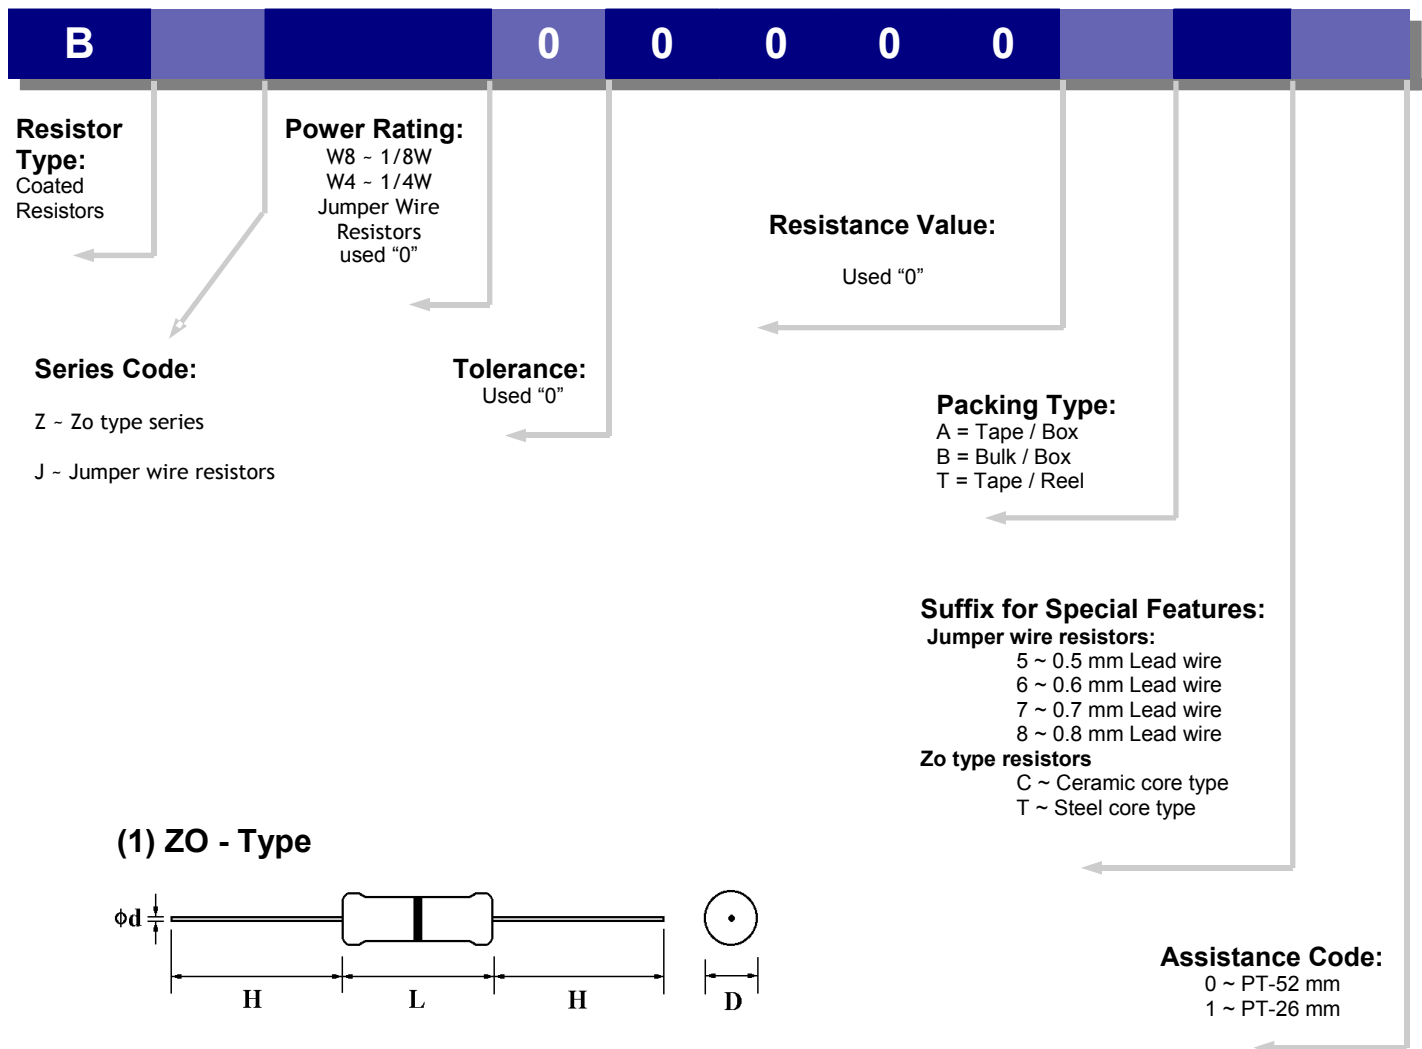

JUMPER WIRES & ZERO OHM RESISTOR

Part No.	Style	Power Rating at 70°C	Dimension (mm)			
			D Max.	L Max.	d $\begin{smallmatrix} +0.2 \\ -0.05 \end{smallmatrix}$	H ± 3
BZW8	ZO - 12	1/8W (0.125W)	1.85	3.5	0.5	28
BZW4	ZO - 25	1/4W (0.25W)	2.5	6.8	0.6	28

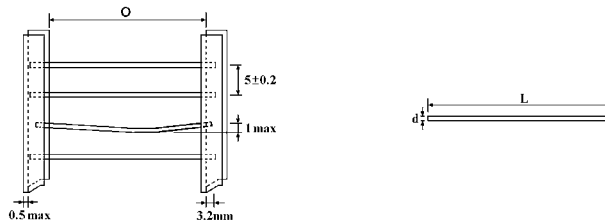

(2) ZW - Type

Part No.	Style	L ± 3	d $\begin{smallmatrix} +0.02 \\ -0.05 \end{smallmatrix}$	O ± 1	
BJ0000000A50	ZW - A	60	0.5	52	26
BJ0000000A60	ZW - B	60	0.6	52	26
BJ0000000A70	ZW - C	60	0.7	52	26
BJ0000000A80	ZW - D	60	0.8	52	26

Characteristics

Requirements	Characteristics
Maximum Resistance	Steel core type is 0.00165 Ω , Ceramic core type is 0.0165 Ω
Lead Material	Tin - plated copper
Body Material (ZO - Type)	Electrical grade, high performance molding compound
Insulation Resistance	Dry - 10,000 M Ω ; Wet - 100 M Ω
Dielectric - Withstanding Voltage	Atmospheric - 500V RMS., Reduced - 325V RMS
Insulation Flammability	Resistor Insulation is self extinguishing within 10 seconds after externally applied flame is removed
Current Rating	25 AMPS at 25°C derating to 0 Amps at 150°C